

RTAY CATALOG



Low Energy and Water Consumption
Easy Montage

Freva is a Member of **FORM** Group of Companies

ABOUT US

FORM Freva Soğutma Sistemleri A.Ş. with its dynamic engineering and manufacturing team based on more than 20 years of knowledge and experience, provides design, manufacturing and turnkey installation services of process water cooling equipment for the comfort and industrial sector.

The devices subject to activity are open and closed type cooling towers, hybrid type (which can operate as semi-wet-semi-dry) cooling towers, dry and adiabatic coolers, evaporative and adiabatic condensers and industrial type fin fan dry type coolers. Especially in today's conditions where energy and water resources are of great importance, our experienced engineer staff aims to support businesses in the process of deciding on the most suitable device for the future by making the necessary feasibility studies through our state-of-the-art product selection programs in order to minimize both energy and water costs in line with the demands of the sector.

MISSION

As FORM Freva Soğutma Sistemleri A.Ş., our mission is to establish a company that continuously develops itself with its dynamic and experienced engineer and manufacturing team, aims at maximum customer satisfaction, has environmental awareness, and pioneers design, project and production services for the expectations of all sectors.

VISION


As a result of our R&D activities that we will carry out continuously, to be the leading brand that offers the latest technological products for the needs of the sector and is preferred.

CONTENTS

Freva RTAY series Open Circuit Cooling Tower	5
Advantages of RTAY Series Open Circuit Counterflow Cooling Towers	6
Information About Tower Models	6
Freva RTAY Series Open Circuit Counterflow Cooling Tower Equipment	6
Film Fill	7
Water Distribution System	7
Drift Eliminator	7
Radial Fan	7
Electric Motor	7
Coating	8
Basin Water Heaters	8
Mechanical Level Float	8
Vibration Switch	8
Semi Closed System Solutions	9
Our Optional Equipment	9-11
Different Color Options	9
Basin Sweeping System	10
Silencer	10
Antivortexhood	10
MCC and DDC Electrical Panel and Automation Systems	11
Electronic Water Level Control	11
Filtration System	11

FREVA RTAY series Open Circuit Cooling Tower

The fluid to be cooled is transferred to the water distribution system located at the upper point of the Freva RTAY series cooling tower by means of the pumps in the system. With the water distribution system, the fluid is sprayed onto the filling material in the tower. At the same time, fresh air is drawn into the tower with the help of radial fans. The air flow occurs upwards, opposing the direction of the water flow. The air transferred from the radial fans to the cooling tower moves up along the fill and is discharged from the tower to the atmosphere from the top of the tower. A small part of the water evaporates in this process. In this way, the heat that is desired to be removed from the system is discarded. The cooled liquid is poured back into the tower basin. The cold water in the basin is sent back to the system.

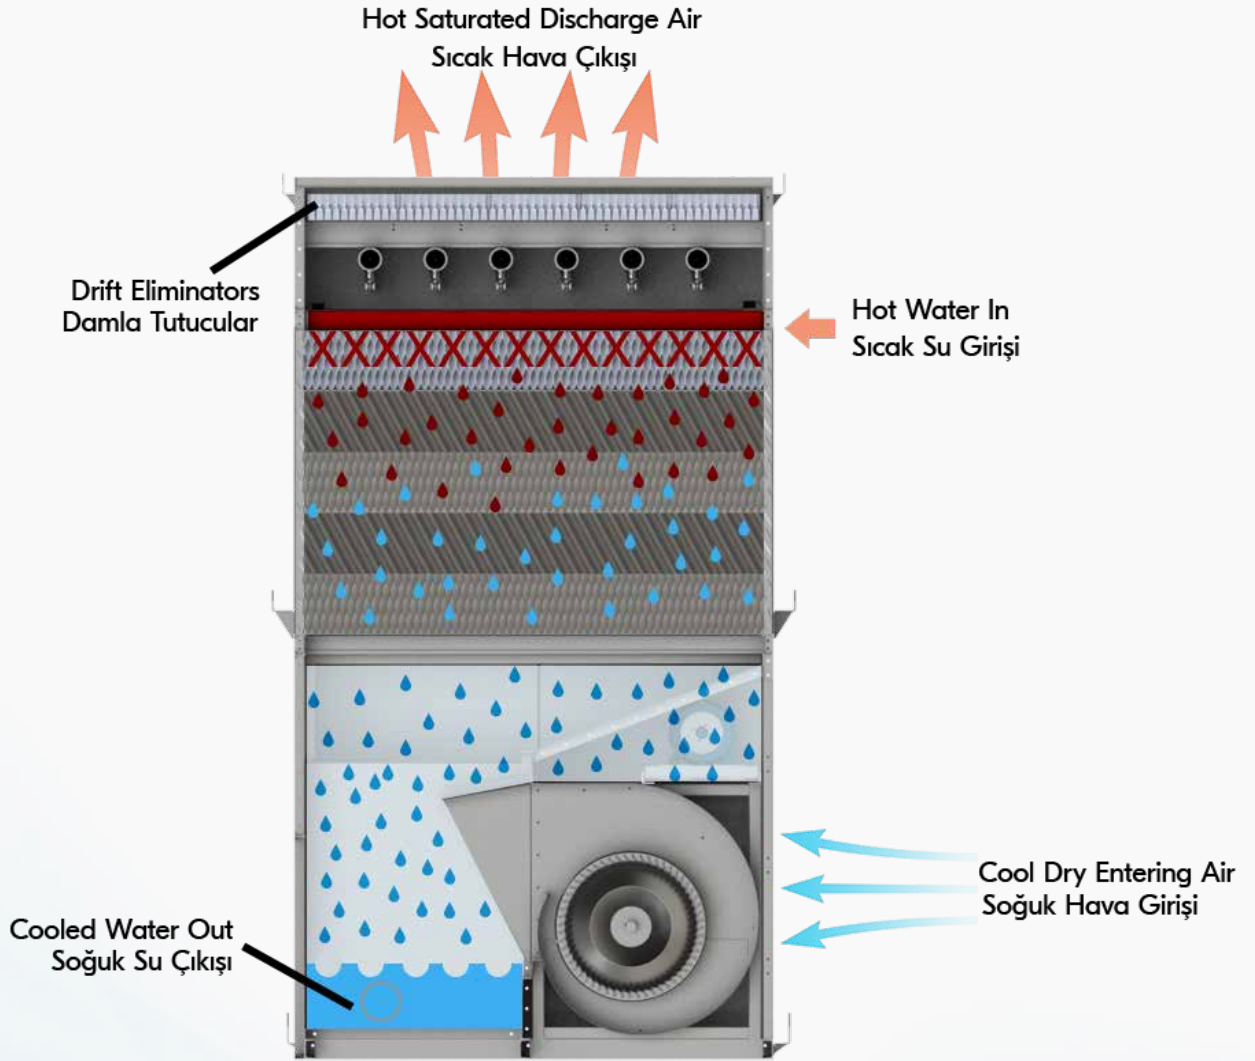

Advantages of RTAY Series Open Circuit Counterflow Cooling Towers



- Initial investment costs are low.
- It has low electricity consumption.
- Provides ease of maintenance, operation and commissioning.

Freva RTAY series open-circuit counterflow cooling towers offer a wide selection of work partners. Thanks to its high energy efficiency design, it provides energy savings in businesses. Thanks to its ultra-quiet fan options, it easily adapts to any comfort application.

Information About Tower Models

RTAY series open loop counter flow water cooling towers meet all the demands of its customers with its wide product range. The model range includes tower models with low electricity consumption and high efficiency. It has cooling tower models with low sound levels with its ultra-quiet fan option, and container-sized products that offer comfortable transportation between continents.

Freva RTAY Series Open Circuit Counterflow Cooling Tower Equipment




Film Fill



The fillings used in the RTAY series are of our special design, and they are designed for maximum heat and mass transfer between air and water. Thanks to its special form, it delays contamination. Except for special cases, it is manufactured from PVC material. It has an operating resistance up to $-5 / 55^{\circ}\text{C}$ and is "ASTM E84 Cls. It is in the A" non-flammability class.

Water Distribution System

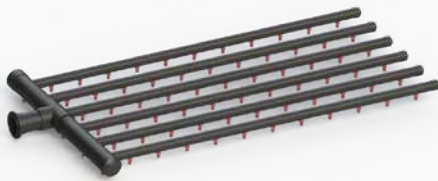

It consists of PVC process water distribution pipes and PP sprinkler groups. It is designed to distribute the process water evenly over the entire surface. Developed for high water delivery performance at low pressure. In this way, it provides energy savings in pump lines. It can be easily disassembled and mounted with the threaded connection.

Drift Eliminator




The drift eliminator used in the RTAY series prevent the process water from leaving the circuit by air, up to 0.02% of the cycle water. This reduces water and chemical consumption. It is very light as it is made of PVC material. In this way, the water distribution system can be easily disassembled in case of maintenance.

Radial Fan



Fans in different models and material classes can be used in the RTAY series. All fans used are manufactured according to the latest generations of their design classes. Silent, Ultra-quiet options and different material options are available for corrosion resistance.

Electric Motor

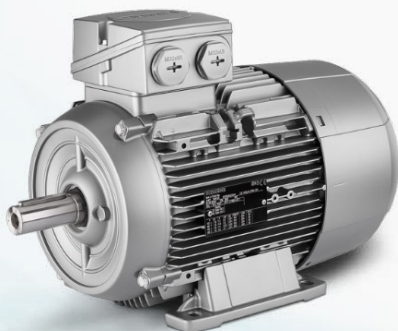

An electric motor is a device that converts electrical energy into mechanical energy. Electric motors generate force by the interaction between the magnetic field and the winding current and are positioned above the carrier base. The motors used in closed-loop water cooling towers have IE3 or higher energy class. The electric motor is the component that creates the fan torque. The torque of the motor is transmitted to the fan by belt or gear.

Coating



The outer body material is generally produced from sheet metal containing 600 grams of zinc per Z600 square meter. The inner and outer surfaces of the sheets are coated with polymer-based epoxy paint. Stainless steel applications are also made according to the customer's request.

Basin Water Heaters



Required for cooling tower operation in winter conditions. The temperature of the basin water is controlled with the help of a temperature transmitter. This prevents the basin water from freezing. Copper and stainless steel materials can be used.

Mechanical Level Float



The float level valve is used for basin water level control, the float height can be adjusted with the horizontally designed arm. When the liquid level rises, the valve closes, or on the contrary, with the rise in the liquid level, the valve opens and begins to discharge.

Vibration Switch



It is located at the top of the tower right next to the fan chimney. It detects the vibration in case of working with vibration in the fan group and ensures that the electric motor is deactivated.

Semi Closed System Solutions

Advantages

- Low initial investment cost.
- Low operating cost.
- Low chemical requirement.
- Low fan electricity consumption.
- Clean process water.



Thanks to the plate heat exchanger placed between the cooling tower circuit and the process circuit, your process will be protected from the polluting effects in the environment. Your process will always be protected from the effects of the external environment, as the cooling tower circuit will return within itself and the process water will complete the circuit within itself. At the same time, businesses using antifreeze would need lower antifreeze usage. Thus, it will reduce the cost of antifreeze.

Our Optional Equipment

Different Color Options




Desired color applications are available according to the needs of our customers. Different color options are offered after our customer specifies the color code they want.

Basin Sweeping System




Thanks to our specially designed sweeping system installed in the tower basin, continuous water circulation is provided on the basin floor. In this way, the formation of sediment on the bottom of the tower basin is prevented, and the tower basin remains clean at all times. By preventing tower performance degradation, your tower will always remain clean.

Silencer



Desired sound level values are provided with special silencers designed to provide the desired sound levels in cooling towers.

Antivortexhood

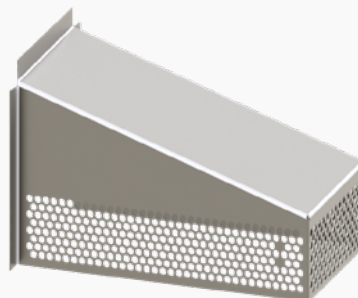

Desired sound level values are provided with special silencers designed to provide the desired sound levels in cooling towers.

MCC and DDC Electrical Panel and Automation Systems



The water cooling tower automation panel provides the operation of the Fan, Pump and Electric heaters on the tower. For the operation of these equipments, motor driver screens, buttons and signal lamps located on the panel lining sheet are used. The first fan drive is called the Master in the system. The entire control scenario runs through this driver. Tower outlet water temperature sensor PT100 is connected. Depending on the temperature, it operates both itself and other drivers with PI control. It also provides output to the pump motor during its operation. It performs the start and stop operations with the signal to be received from the vibration switches. The panel provides power output to the electric heater and this output is switched on and off with buttons. The electric heater performs its operation depending on its own thermostat.

Electronic Water Level Control



It is designed to control the pool water level electromechanically. Unaffected by variable environmental conditions, the water level in the basin is measured magnetically and brought to the desired level with a solenoid valve. The mains pressure should be at most 10 bar. Electronic equipment is also available for overflow or low water level alarms. In this way, the operation of the cooling tower is facilitated and the basin water level can be monitored from the central systems.

Filtration System



The water cooling tower filtration system filters the particles in the water cooled in the cooling tower and removes them from the cooling tower. In this way, the performance of the cooling tower will be increased. The risk of corrosion is reduced. It will provide low energy and chemical consumption.



FORM

FORM FREVA SOĞUTMA SİSTEMLERİ A.Ş.

🌐 www.formfreva.com ✉ info@formgroup.com
FORM Freva Soğutma Sistemleri A.Ş.
Eyüpsultan Mah. İbni Sina Cad. No: 7 Sancaktepe, İstanbul, Türkiye